

◆ SUMITOMO TIRES

PATTERN DIGEST

PASSENGER CAR TYRES / 4x4[4WD] & SUV TYRES
LIGHT TRUCK TYRES / TRUCK & BUS TYRES



PATTERN DIGEST 2016

CONTENTS

GENERAL INFORMATION	03-04
PASSENGER CAR TYRES	07-15
4×4 (4WD) & SUV TYRES	16-21
LIGHT TRUCK TYRES	22-23
SAFETY INFORMATION for PCR/4×4/LTR TYRES	24
TRUCK & BUS TYRES	25-31
SAFETY INFORMATION for TRUCK and BUS TYRES	32





GENERAL INFORMATION

SUMITOMO offers a wide range of tyres.

This PATTERN DIGEST is designed to help users select the most suitable tyres which meet their needs.

Useful information is included to assist users in designating appropriate tyre specifications for their vehicles with ease. Inquiries and requests for additional information should be directed to the nearest SUMITOMO dealers or SUMITOMO representatives.

SUMITOMO tyres are designed in line with The Japan Automobile Tyre Manufacturers Association, Inc.(JATMA), The Tire and Rim Association, Inc.(TRA) and The European Tyre and Rim Technical Organization(ETRTO).

BASIC TYRE FUNCTIONS

Basic tyre functions are the capability of supporting a given load up to a given speed and transmitting the driving, the steering and the braking forces to the ground.

DIMENSIONS

RIM WIDTH

Linear distance between the flanges of the rim.

SECTION HEIGHT

Half the distance between the overall diameter and the nominal rim diameter.

SECTION WIDTH

The linear distance between the outsides of the sidewalls of an inflated tyre excluding elevation due to labeling (markings), decorations, or protective bands or ribs.

OVERALL WIDTH

The linear distance between the outsides of the sidewalls of an inflated tyre including elevation due to labeling (markings), decorations, or protective bands or ribs.

OVERALL DIAMETER


The diameter of an inflated tyre at the outermost surface of the tread.

NOMINAL RIM DIAMETER

It is a size code figure for reference purposes only, as indicated in the tyre and rim designation.

NOMINAL ASPECT RATIO

One hundred times the ratio of the section height to the section which of the tyre on its theoretical rim.

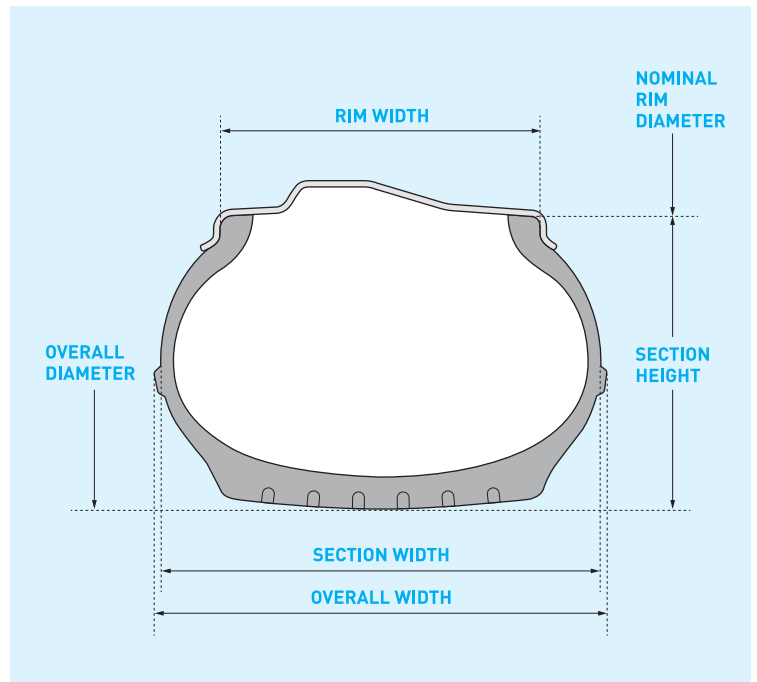

SIDEWALL DESCRIPTION

SERVICE DESCRIPTION

In addition to the Tyre Size Designation a tyre may be identified by a Service Description consisting of a load index (or two Load Indices in the case of single/dual fitments) and a speed symbol.

LOAD CAPACITY

The maximum load a tyre is permitted to carry under specified operating conditions.

INFLATION PRESSURE

Inflation pressure means the pressure taken with the tyre at ambient temperature and does not include any pressure build-up due to tyre usage.

M+S

Tyres specifically designed for mud and snow (Winter). MS, M&S, M.S and M-S are also permitted.

SPEED SYMBOL

The SPEED SYMBOL indicates the maximum speed at which the tyre can carry a load corresponding to its Load Index under service descriptions specified by the tyre manufacturer.

LOAD INDEX

The LOAD INDEX is a numerical code associated with the maximum load a tyre is permitted to carry at the speed indicated by its Speed Symbol under service conditions specified by the tyre manufacturer.

REINFORCED (EXTRA LOAD)

Passenger car tyres and/or motorcycle tyres designated for loads and inflation pressure higher than the Standard version.

TEMPORARY USE ONLY

Passenger car tyres intended for temporary use as spare in one position only.

SPEED SYMBOL

Speed Symbol	Speed (km/h)
A1	5
A2	10
A3	15
A4	20
A5	25
A6	30
A7	35
A8	40
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300

*If tyres are suitable for speed over 300km/h, the Service description should be marked within brackets.
e.g. 195/50ZR15 (82Y)

LOAD INDEX

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
0	45	40	140	80	450	120	1,400	160	4,500	200	14,000	240	45,000		
1	46.2	41	145	81	462	121	1,450	161	4,625	201	14,500	241	46,250		
2	47.5	42	150	82	475	122	1,500	162	4,750	202	15,000	242	47,500		
3	48.7	43	155	83	487	123	1,550	163	4,875	203	15,500	243	48,750		
4	50.0	44	160	84	500	124	1,600	164	5,000	204	16,000	244	50,000		
5	51.5	45	165	85	515	125	1,650	165	5,150	205	16,500	245	51,500		
6	53.0	46	170	86	530	126	1,700	166	5,300	206	17,000	246	53,000		
7	54.5	47	175	87	545	127	1,750	167	5,450	207	17,500	247	54,500		
8	56.0	48	180	88	560	128	1,800	168	5,600	208	18,000	248	56,000		
9	58.0	49	185	89	580	129	1,850	169	5,800	209	18,500	249	58,000		
10	60.0	50	190	90	600	130	1,900	170	6,000	210	19,000	250	60,000		
11	61.5	51	195	91	615	131	1,950	171	6,150	211	19,500	251	61,500		
12	63.0	52	200	92	630	132	2,000	172	6,300	212	20,000	252	63,000		
13	65.0	53	206	93	650	133	2,060	173	6,500	213	20,600	253	65,000		
14	67.0	54	212	94	670	134	2,120	174	6,700	214	21,200	254	67,000		
15	69.0	55	218	95	690	135	2,180	175	6,900	215	21,800	255	69,000		
16	71.0	56	224	96	710	136	2,240	176	7,100	216	22,400	256	71,000		
17	73.0	57	230	97	730	137	2,300	177	7,300	217	23,000	257	73,000		
18	75.0	58	236	98	750	138	2,360	178	7,500	218	23,600	258	75,000		
19	77.5	59	243	99	775	139	2,430	179	7,750	219	24,300	259	77,500		
20	80.0	60	250	100	800	140	2,500	180	8,000	220	25,000	260	80,000		
21	82.5	61	257	101	825	141	2,575	181	8,250	221	25,750	261	82,500		
22	85.0	62	265	102	850	142	2,650	182	8,500	222	26,500	262	85,000		
23	87.5	63	272	103	875	143	2,725	183	8,750	223	27,250	263	87,500		
24	90.0	64	280	104	900	144	2,800	184	9,000	224	28,000	264	90,000		
25	92.5	65	290	105	925	145	2,900	185	9,250	225	29,000	265	92,500		
26	95.0	66	300	106	950	146	3,000	186	9,500	226	30,000	266	95,000		
27	97.5	67	307	107	975	147	3,075	187	9,750	227	30,750	267	97,500		
28	100	68	315	108	1,000	148	3,150	188	10,000	228	31,500	268	100,000		
29	103	69	325	109	1,030	149	3,250	189	10,300	229	32,500	269	103,000		
30	106	70	335	110	1,060	150	3,350	190	10,600	230	33,500	270	106,000		
31	109	71	345	111	1,090	151	3,450	191	10,900	231	34,500	271	109,000		
32	112	72	355	112	1,120	152	3,550	192	11,200	232	35,500	272	112,000		
33	115	73	365	113	1,150	153	3,650	193	11,500	233	36,500	273	115,000		
34	118	74	375	114	1,180	154	3,750	194	11,800	234	37,500	274	118,000		
35	121	75	387	115	1,215	155	3,875	195	12,150	235	38,750	275	121,000		
36	125	76	400	116	1,250	156	4,000	196	12,500	236	40,000	276	125,000		
37	128	77	412	117	1,285	157	4,125	197	12,850	237	41,250	277	128,000		
38	132	78	425	118	1,320	158	4,250	198	13,200	238	42,500	278	132,000		
39	136	79	437	119	1,360	159	4,375	199	13,600	239	43,750	279	136,000		

SEARCHING CLUE

Please refer to the following guidelines in general to reach the tyres you are looking for. For more details, separate guidelines are available in each category.

TT	Tube Type	WLT	Raised White Letter	XL	Extra Load
TL	Tubeless	BLT	Raised Black Letter	LI	Load Index
MFS	Maximum Flange Shield	OWL	Outlined White Letter	SS	Speed Symbol
E-No.	E Number	SL	White Slim Line	P.R.	Ply Rating
RF	Reinforced	BLK	Black Sidewall		

NOTICE: All the information in this booklet is subject to change with or without notice.

PASSENGER CAR TYRE CONVERSION CHART

(THIS CHART DOES NOT IMPLY COMPLETE INTERCHANGEABILITY)

70 SERIES 65-60-55-50-45-4-35 SERIES

Standard equipment size	Correspondence size					
	65SERIES	60SERIES	55SERIES	50SERIES	45SERIES	40SERIES
145/70R12	155/65R12 145/65R13	165/60R12 155/60R13 165/60R13	155/55R14			
155/70R12	155/65R13	165/60R13 175/60R13				
165/70R12	165/65R13	175/60R13 185/60R13 195/60R13	185/55R14			
175/70R12		185/60R13 195/60R13	185/55R14			
145/70R13	155/65R13 165/65R13	165/60R13 175/60R13 185/60R13	165/55R14	165/50R15		
155/70R13	165/65R13 155/65R14	175/60R13 185/60R13 195/60R13 165/60R14	185/55R14 165/55R15			
165/70R13	195/65R13 165/65R14 175/65R14	185/60R13 195/60R13 205/60R13 175/60R14 185/60R14	185/55R14 195/55R14 185/55R15	195/50R15	195/45R16	
175/70R13	195/65R13 175/65R14 185/65R14	195/60R13 205/60R13 185/60R14 195/60R14 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 215/50R15	205/45R16	
185/70R13	195/65R13 185/65R14 195/65R14	205/60R13 195/60R14 205/60R14 195/60R15	205/55R15	205/50R15 215/50R15 225/50R15 205/50R16	215/45R16	
165/70R14	175/65R14 185/65R14 165/65R15	185/60R14 195/60R14 205/60R14 175/60R15 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 215/50R15 195/50R16	205/45R16	
175/70R14	185/65R14 195/65R14 205/65R14 175/65R15 185/65R15	195/60R14 205/60R14 185/60R15 195/60R15 205/60R15 185/60R16	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16 215/50R16	215/45R16 245/45R16 205/45R17	
185/70R14	195/65R14 205/65R14 215/65R14 185/65R15 195/65R15 205/65R15	205/60R14 195/60R15 205/60R15 215/60R15 195/60R16	205/55R15 215/55R15 205/55R16 215/55R16	215/50R15 225/50R15 215/50R16 225/50R16 205/50R17	245/45R16 225/45R17	245/40R17 255/40R17
195/70R14	205/65R14 215/65R14 195/65R15 205/65R15 195/65R16	205/60R15 215/60R15 205/60R16	205/55R16 215/55R16 225/55R16	225/50R15 225/50R16 245/50R16 215/50R17	245/45R16 225/45R17 235/45R17 245/45R17	245/40R17 255/40R17
205/70R14	215/65R14 205/65R15 215/65R15 205/65R16	215/60R15 215/60R16	225/55R16 215/55R17	245/50R16 225/50R17 235/50R17	245/45R16 235/45R17	255/40R17
195/70R15	205/65R15 215/65R15 195/65R16 205/65R16	215/60R15 205/60R16 215/60R16 225/60R16 205/60R17	215/55R16 225/55R16 215/55R17 225/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17 235/45R18	255/40R17 245/40R18 255/40R18
205/70R15	215/65R15 205/65R16 215/65R16	215/60R16 225/60R16 215/60R17	225/55R16 225/55R17	245/50R16 235/50R17 225/50R18 235/50R18	245/45R17 245/45R18	255/40R18
215/70R15	215/65R16 235/65R16	225/60R16 235/60R16 225/60R17	225/55R18	245/50R16 245/50R18		
225/70R15	235/65R16 225/65R17	235/60R16	235/55R18	245/50R18		
235/70R15	235/65R16 255/65R16					
255/70R15	255/65R16					
265/70R15	265/65R17	265/60R18				
205/70R16	215/65R16 235/65R16 225/65R17	225/60R16 235/60R16 225/60R17	225/55R17 225/55R18 235/55R18	235/50R18 245/50R18	245/45R19	285/35R19
215/70R16	235/65R16 225/65R17	235/60R16 225/60R17	235/55R18	245/50R18		285/35R19
225/70R16	235/65R16 255/65R16 225/65R17 225/65R18	235/60R18 245/60R18	255/55R18			
235/70R16	255/65R16	245/60R18	255/55R18			
245/70R16	255/65R16 265/65R17	265/60R18 245/60R19				
255/70R16	255/65R16 265/65R17 275/65R17	265/60R18 275/60R18				
265/70R16	265/65R17 275/65R17	275/60R18 285/60R18				
275/70R16	275/65R17	285/60R18				
215/70R17	225/65R17 235/65R17 225/65R18 235/65R18	235/60R18 245/60R18	255/55R18 235/55R19	245/50R20		
245/70R17	265/65R17 275/65R17	265/60R18 275/60R18 285/60R18		285/50R20		

65 SERIES 60-55-50-45-40-35 SERIES

Standard equipment size	Correspondence size					
	60SERIES	55SERIES	50SERIES	45SERIES	40SERIES	35SERIES
155/65R12	165/60R12					
145/65R13	155/60R13 165/60R13	155/55R14				
155/65R13	165/60R13 175/60R13		165/50R15			
165/65R13	175/60R13 185/60R13 195/60R13	185/55R14				
195/65R13	205/60R13					
145/65R14	165/60R14	165/55R14	165/50R15			
155/65R14	165/60R14 175/60R14	185/55R14 195/55R14 165/55R15 175/55R15				
165/65R14	175/60R14 185/60R14 195/60R14	185/55R14 195/55R14 185/55R15	195/50R15 205/50R15	195/45R16		
175/65R14	185/60R14 195/60R14 205/60R14 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 205/50R15 215/50R15	205/45R16		
185/65R14	195/60R14 205/60R14	205/55R15	205/50R15 215/50R15 225/50R15 205/50R16	215/45R16		
195/65R14	205/60R14 205/60R15	215/55R15	225/50R15 215/50R16			
205/65R14	205/60R15 215/60R15	205/55R16	225/50R15 225/50R16	245/45R16 225/45R17	245/40R17	
215/65R14	215/60R15			245/45R16 235/45R17	255/40R17	
145/65R15	155/60R15 165/60R15	165/55R15 175/55R15	165/50R15 195/50R15 165/50R16			
165/65R15	175/60R15 185/60R15	185/55R15 195/55R15 205/55R15 185/55R16	195/50R15 205/50R15 215/50R15 225/50R15 195/50R16	205/45R16 215/45R16	215/40R17	
175/65R15	185/60R15 195/60R15 205/60R15 185/60R16	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16 215/50R16	215/45R16 205/45R17		
185/65R15	195/60R15 205/60R15 215/60R15 195/60R16	205/55R15 215/55R15 205/55R16	215/50R15 225/50R15 215/50R16 225/50R16 205/50R17	245/45R16 225/45R17	245/40R17	
195/65R15	205/60R15 215/60R15 205/60R16	205/55R16 215/55R16 215/55R16	225/50R15 225/50R16 245/50R16 215/50R17	245/45R16 225/45R17 235/45R17 215/50R17	245/40R17 255/40R17 235/40R18	
205/65R15	215/60R15 215/60R16	225/55R16	245/50R16 225/50R17 235/50R17	245/45R16 235/45R17	255/40R17	
215/65R15	225/60R16	225/55R17	245/50R16 235/50R17 245/50R17	245/50R16 235/50R17 245/50R17		
195/65R16	205/60R16 215/60R16 225/60R16	215/55R16 225/55R16 215/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 225/50R17 235/50R17	245/45R16 255/40R17 245/40R18 255/40R18	255/35R19
205/65R16	215/60R16 225/60R16 235/60R16 215/60R17	225/55R16 225/55R17	245/50R16 235/50R17 225/50R18 235/50R18	245/45R17 245/45R18		275/35R19
215/65R16	215/65R16 235/65R16	225/60R16 235/60R16 225/60R17	245/50R16 245/50R18			
225/65R16	235/65R16 225/65R17	235/60R16	235/55R18			
235/65R16	235/65R16 255/65R16					
255/65R16	255/65R16					
265/65R16	265/65R17	265/60R18				
205/70R16	215/65R16 235/65R16 225/65R17	225/60R16 235/60R16 225/60R17	225/55R17 225/55R18 235/55R18	235/50R18 245/50R18	245/45R19	285/35R19
215/70R16	235/65R16 225/65R17	235/60R16 225/60R17	235/55R18	245/50R18		285/35R19
225/70R16	235/65R16 255/65R16 225/65R17 225/65R18	235/60R18 245/60R18	255/55R18			
235/70R16	255/65R16	245/60R18	255/55R18			
245/70R16	255/65R16 265/65R17	265/60R18 245/60R19				
255/70R16	255/65R16 265/65R17 275/65R17	265/60R18 275/60R18				
265/70R16	265/65R17 275/65R17	275/60R18 285/60R18				
275/70R16	275/65R17	285/60R18				
215/70R17	225/65R17 235/65R17 225/65R18 235/65R18	235/60R18 245/60R18	255/55R18 235/55R19	245/50R20		
245/70R17	265/65R17 275/65R17	265/60R18 275/60R18 285/60R18		285/50R20		

NOTE: This chart is based only on the overall diameter of the tyre.

- Load index (LI) should not be less than that of the original when a tyre is replaced by a tyre of another size.
example 195/60R15 88H→195/55R16 87V Not recommended
- Tyre clearance from the body and suspension is variable with each vehicle, and further varies due to modifications and different wheel offsets. The above chart is not meant to indicate that the sizes listed above can actually be mounted on vehicles.

60 SERIES 55-50-45-40-35-30 SERIES

Standard equipment size	Correspondence size					
	55SERIES	50SERIES	45SERIES	40SERIES	35SERIES	30SERIES
185/60R13	185/55R14					
165/60R14	185/55R14 195/55R14 165/55R15 175/55R15					
175/60R14	185/55R14 195/55R14	195/50R15				
185/60R14	195/55R14 185/55R15	195/50R15 205/50R15	205/45R16			
195/60R14		205/50R15 215/50R15	215/45R16			
205/60R14	215/55R15	225/50R15				
155/60R15	165/55R15 175/55R15	195/50R15 165/50R16				
165/60R15	175/55R15 185/55R15	195/50R15 205/50R15	195/45R16 205/45R16			
175/60R15	185/55R15 195/55R15 205/55R15 185/55R16	195/50R15 205/50R15 215/50R15 225/50R15 195/50R16	205/45R16 215/45R16	215/40R17		
185/60R15	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16	215/45R16			
195/60R15	205/55R15 215/55R15 205/55R16	215/50R15 225/50R15 215/50R16 225/50R16	245/45R16	245/40R17		
205/60R15	205/55R16 215/55R16	225/50R15 225/50R16	245/45R16 225/45R17	245/40R17 255/40R17		
215/60R15	225/55R16	245/50R16	235/45R17 245/45R17			
175/60R16	185/55R16 195/55R16 205/55R16	195/50R16 205/50R16 215/50R16 225/50R16	205/45R16 215/45R16 245/45R16 205/45R17 215/45R17	215/40R17 245/40R17		
185/60R16	195/55R16 205/55R16 215/55R16	205/50R16 215/50R16 225/50R16 205/50R17 225/45R17	215/45R16 245/45R16 215/45R17 215/45R17	245/40R17 255/40R17	255/35R18	
195/60R16	205/55R16 215/55R16 225/55R16	215/50R16 225/50R16 245/50R16 205/50R17 215/50R17	245/45R16 225/45R17 235/45R17 245/45R17	245/40R17 235/40R18	255/35R18	
205/60R16	215/55R16 225/55R16 215/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17	255/40R17 245/40R18		
215/60R16	225/55R16 225/55R17	245/50R16 235/50R17 225/50R18	245/45R17 245/45R18	255/40R18 275/35R19		
225/60R16		245/50R16			285/35R19	
235/60R16		245/50R18				
205/60R17	215/55R17 225/55R17 215/55R18	225/50R17 235/50R17 225/50R18 235/50R18 245/50R18	235/45R17 245/45R17 235/45R18 245/45R18	255/40R18 245/40R19	275/35R19 285/35R19	295/30R20
215/60R17	225/55R17 225/55R18	235/50R17 235/50R18 245/50R18	245/45R18 255/40R19	275/35R19 285/35R19	295/30R20 305/30R20	
225/60R17	235/55R18	245/50R18			285/35R19 285/35R20	305/30R20
225/60R18	235/55R18 255/55R19	245/50R18			285/35R20	
235/60R18	255/55R18					
245/60R18	255/55R18					
265/60R18		285/50R20				
275/60R18		285/50R20				
245/60R19		285/50R20				

55 SERIES 50-45-40-35-30 SERIES

Standard equipment size	Correspondence size				
	50SERIES	45SERIES	40SERIES	35SERIES	30SERIES
165/55R14	165/50R15				
195/55R14	195/50R15 205/50R15				
165/55R15	195/50R15 165/50R16				
175/55R15	195/50R15 205/50R15	195/45R16			
185/55R15	195/50R15 205/50R15 215/50R15 195/50R16	205/45R16			
195/55R15	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16	215/45R16			
205/55R15	215/50R15 225/50R15 205/50R16 215/50R16	245/45R16			
215/55R15	225/50R15 215/50R16 225/50R16	245/45R16 245/40R17			
185/55R16	195/50R16 205/50R16 215/50R16	205/45R16 215/45R16 245/45R16 205/45R17	215/40R17		
195/55R16	205/50R16 215/50R16 225/50R16 205/50R17	215/45R16 245/45R16 215/45R17	245/40R17		
205/55R16	215/50R16 225/50R16 245/50R16 205/50R17 215/50R17	245/45R16 225/45R17 235/45R17	245/40R17 255/40R17 235/40R18	255/35R18	
215/55R16	225/50R16 245/50R16 215/50R17 225/50R17	245/45R16 225/45R17 245/45R17	245/40R17 255/40R17 235/40R18		
225/55R16	245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17	255/40R17 255/40R18		
205/55R17	215/50R17 225/50R17 235/50R17	225/45R17 235/45R17 245/45R17 225/45R18 235/45R18	245/40R17 255/40R17 235/40R18 245/40R18 255/40R18	255/35R19	
215/55R17	225/50R17 235/50R17 225/50R18 235/50R18	235/45R17 245/45R17 235/45R18 245/45R18	255/40R17 245/40R18 255/40R18	275/35R19	
225/55R17	235/50R17 225/50R18 235/50R18	245/45R17 245/45R18 245/45R18	255/40R18 255/40R19	275/35R19 285/35R19	295/30R20
205/55R18	225/50R18 235/50R18 245/50R18	225/45R18 235/45R18 225/45R19	235/40R18 245/40R18 255/40R18 245/40R19 265/35R20	255/35R19 275/35R19 285/35R19 255/35R20 265/35R20	295/30R20 305/30R20
215/55R18	225/50R18 235/50R18 245/50R18	235/45R18 245/45R18 245/45R19	255/40R18 245/40R19 265/35R20	275/35R19 285/35R19 265/35R20	295/30R20 305/30R20
225/55R18	235/50R18 245/50R18	245/45R18 245/45R19	255/40R18 285/35R19 285/35R20 285/35R20	295/30R20 305/30R20 305/30R20	
235/55R18	245/50R18				
235/55R19	245/50R20				
235/55R20	245/50R20				

50 SERIES 45-40-35-30 SERIES

Standard equipment size	Correspondence size			
	45SERIES	40SERIES	35SERIES	30SERIES
195/50R15	205/45R16			
205/50R15	215/45R16			
225/50R15	245/45R16			
165/50R16	195/45R16			
195/50R16	215/45R16 205/45R17			
205/50R16	245/45R16 215/45R17			
215/50R16	245/45R16 225/45R17 255/40R17	245/40R17 255/40R17	255/35R18	
225/50R16	245/45R16 235/45R17	255/40R17		
205/50R17	225/45R17 235/45R17 245/45R17	245/40R17 255/40R17 235/40R18	255/35R18	
215/50R17	225/45R17 235/45R17 245/45R18 225/45R18	245/40R17 255/40R17 235/40R18 245/40R18		
225/50R17	235/45R17 245/45R17 235/45R18 245/45R18	255/40R17 255/40R18	275/35R19	
235/50R17	245/45R18		275/35R19	
225/50R18	245/45R18	255/40R18 255/40R19	275/35R19 285/35R19 265/35R20	295/30R20 305/30R20
235/50R18	245/45R19		285/35R19	295/30R20 305/30R20
245/50R18			285/35R20	

45 SERIES 40-35-30 SERIES

Standard equipment size	Correspondence size		
	40SERIES	35SERIES	30SERIES
195/45R16	205/40R17		
205/45R16	215/40R17		
245/45R16	255/40R17		
195/45R17	215/40R17		
205/45R17	245/40R17 255/40R17 215/40R18		
215/45R17	245/40R17 255/40R17 225/40R18 235/40R18	255/35R18	
225/45R17	245/40R17 255/40R17 235/40R18	255/35R18	
235/45R17	255/40R17 245/40R18 255/40R18		
245/45R17	255/40R18	255/35R18	
215/45R18	245/40R18 255/40R18 225/40R19	255/35R19	
225/45R18	235/40R18 245/40R18 255/40R18	275/35R19 285/35R19	295/30R20
235/45R18	245/40R19 255/40R19	275/35R19 285/35R19	295/30R20 305/30R20
245/45R18	255/40R19	275/35R19 285/35R19	295/30R20 305/30R20
225/45R19	245/40R19 255/40R19 245/40R20	275/35R19 285/35R19 255/35R20 265/35R20	295/30R20 305/30R20 305/30R20
245/45R19		285/35R19 285/35R20	305/30R20

40 SERIES 35-30 SERIES

Standard equipment size	Correspondence size	
	35SERIES	30SERIES
215/40R18	255/35R18	
225/40R18	255/35R18	
235/40R18	255/35R19	
245/40R18	275/35R19	
255/40R18	275/35R19	
225/40R19	255/35R19 275/35R19 285/35R19	
245/40R19	275/35R19 285/35R19 265/35R20	295/30R20 305/30R20
255/40R19	275/35R19 285/35R19 285/35R20	295/30R20 305/30R20
245/40R20	265/35R20 285/35R20	295/30R20 305/30R20
255/40R20	285/35R20	295/30R20 305/30R20

35 SERIES 30 SERIES

Standard equipment size	Correspondence size	30SERIES
275/35R19		295/30R20 305/30R20
285/35R19		305/30R20
255/35R20		295/30R20 305/30R20
265/35R20		295/30R20 305/30R20


PASSENGER CAR TYRES

LINE-UP AND AVAILABLE SIZES

Series	Tyre Size	LI		HTR Z III (*HTR Z II)	HTR ENHANCE L/X (*HTR ENHANCE C/X)	HTR A/S P01	HTR2000	HTR200	HTR T4	HTR4
		St'd	Reinf							
25 30	295/25R22	-	97	ZR 97Y						
	285/30R18	93	97	ZR 97Y						
	295/30R18	94	98	ZR 94Y						
	265/30R19	89	93	ZR 93W,93Y						
	275/30R19	92	96	ZR 96Y						
	235/30R20	-	88	ZR 88W,88Y						
	245/30R20	86	90	ZR 90W,90Y						
	255/30R20	88	92	ZR 92Y						
	275/30R20	93	97	ZR 97Y						
	285/30R20	95	99	ZR 99Y						
35	215/35R18	80	84	ZR 84W,84Y						
	255/35R18	90	94	ZR 94W,94Y						
	265/35R18	93	97	ZR 97Y						
	275/35R18	95	99	ZR 95Y						
	285/35R18	97	101	ZR 97Y						
	225/35R19	84	88	ZR 88W,88Y						
	235/35R19	87	91	ZR 91Y						
	245/35R19	89	93	ZR 93Y						
	255/35R19	92	96	ZR 96Y						
	275/35R19	96	100	ZR 96Y						
	285/35R19	99	103	ZR 99Y						
	225/35R20	-	90	ZR 90Y						
	245/35R20	91	95	ZR 95Y						
	255/35R20	93	97	ZR 97Y						
	275/35R20	98	102	ZR 102Y						
	205/40R17	80	84	*ZR 80W		84W				
	215/40R17	83	87	*ZR 83W						
	245/40R17	91	95	ZR 95W,95Y		91W				
40	255/40R17	94	98	ZR 94Y		94W				
	275/40R17	98	-	ZR 98Y		98W				
	215/40R18	85	89	ZR 89Y						
	225/40R18	88	92	ZR 92Y		88W				
	235/40R18	91	95	ZR 95W,95Y		91W				
	245/40R18	93	97	ZR 97Y		93W				
	255/40R18	95	99	ZR 99Y						
	265/40R18	97	101	ZR 101Y						
	275/40R18	99	103	ZR 99W,99Y						
	225/40R19	89	93	ZR 93W,93Y						
	245/40R19	94	98	ZR 98Y						

(P) : P-metric sizes designed based on the TRA.

for PASSENGER CARS

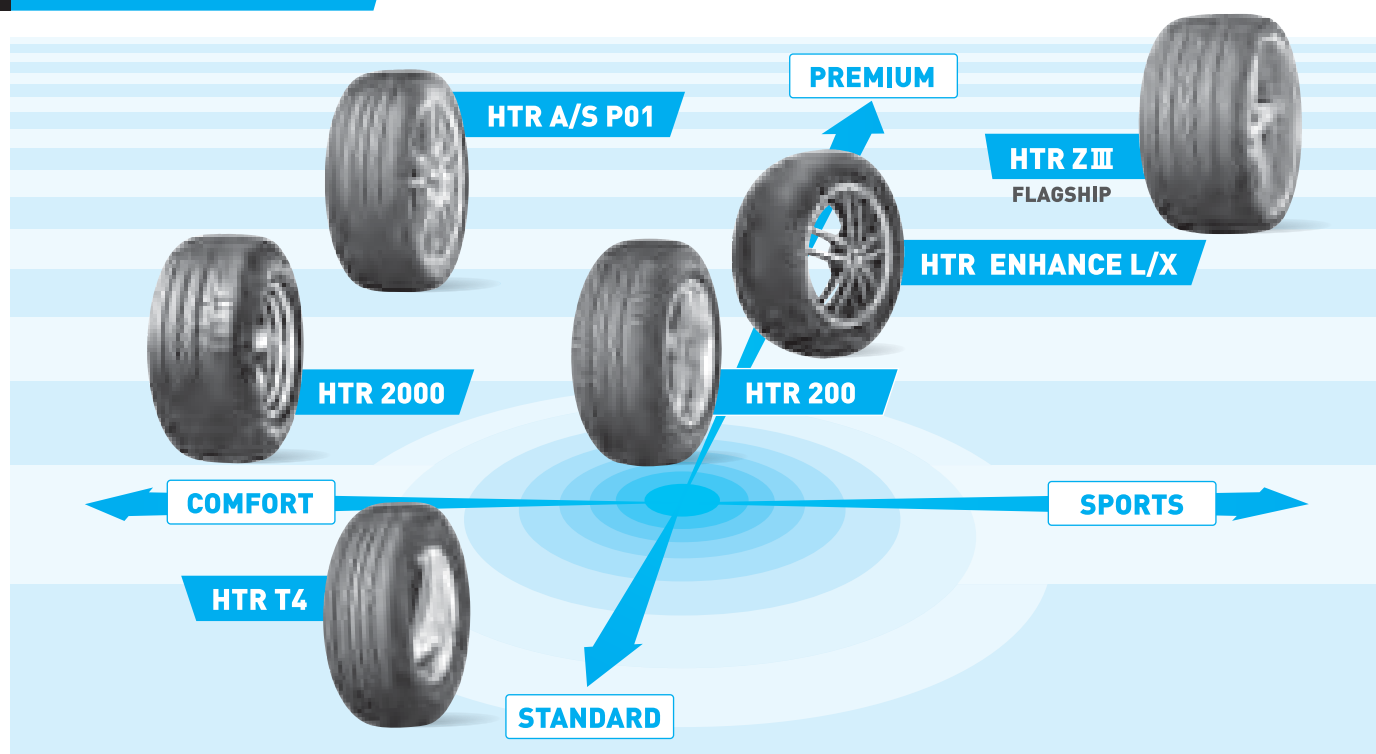

Series	Tyre Size	LI		HTR ZIII (*HTR ZII)	HTR ENHANCE L/X (*HTR ENHANCE C/X)	HTR A/S P01	HTR2000	HTR200	HTR T4	HTR4
		St'd	Reinf							
40	255/40R19	96	100	ZR 100W,100Y						
	275/40R19	101	105	ZR 101Y						
	245/40R20	95	99	ZR 99Y						
45	205/45R16	83	87	*ZR 83W						
	205/45R17	84	88			88W				
	215/45R17	87	91	ZR 87Y		87W				
	225/45R17	91	94	ZR 94Y		91W				
	235/45R17	94	97	ZR 94W,94Y		94W				
	245/45R17	95	99	ZR 95Y		95W				
	215/45R18	89	93			89W				
	225/45R18	91	95	ZR 95Y		91W				
	245/45R18	96	100	ZR 100Y		100W				
	255/45R18	99	103	ZR 103Y						
	245/45R19	98	102	ZR 98Y						
50	175/50R13	72	76					72H		
	215/50R13	84	-					85H		
	245/50R14	93	-			(P) 93S				
	195/50R15	82	86					82H		
	205/50R15	86	89					86H		
	225/50R15	91	95					91H		
	265/50R15	101	-			(P) 99S				
	295/50R15	108	-			(P) 105S				
	205/50R16	87	91	*ZR 87W		87H,87V				
	225/50R16	92	96			92H, 92V				
	245/50R16	97	-			97H, 97W				
	205/50R17	89	93	ZR 93W,93Y		89W				
	215/50R17	91	95	ZR 95Y		91W				
	225/50R17	94	98	ZR 94W,94Y		94W				
	235/50R17	96	100	ZR 96Y		100W				
	225/50R18	95	99			95W				
	235/50R18	97	101	ZR 97W,97Y		101W				
55	195/55R15	85	89			85V				
	205/55R16	91	94			91H, 91V			(P) 89T	
	215/55R16	93	97			93H, 93V				
	225/55R16	95	99			95H, 95V				
	215/55R17	94	98		94V	94V				
	225/55R17	97	101		97V	97H, 97V				
	235/55R17	99	103	ZR 99W,99Y		99H, 99W				
	235/55R18	-	-		100V					
60	185/60R13	80	-					80H		
	195/60R13	83	-					84H		
	205/60R13	86	-			(P) 86S		87H		
	185/60R14	82	86			82H		82H	(P) 82T	
	195/60R14	86	-			86H		86H	(P) 85T	
	205/60R14	88	-					89H		
	235/60R14	96	-				(P) 96S			
	245/60R14	99	-				(P) 98S			
	195/60R15	88	92			88H		88H	(P) 87T	
	205/60R15	91	95			91H		91H	(P) 90T	
	215/60R15	94	98			94H		94H	(P) 93T	
	225/60R15	96	-							(P) 95H
	255/60R15	102	-				(P) 102S			
	275/60R15	107	-				(P) 107S			
	205/60R16	92	96			92H, 92V				
	215/60R16	95	99			99H,95V			(P) 94T	
	225/60R16	98	102	*ZR 98W		98H, 98V			(P) 97T	
	235/60R16	100	104	*ZR 100W	100V	100H				
	225/60R17	-	-		99T					
	225/60R18	100	104			100H				
	245/60R18	-	-		*105T					
65	175/65R14	82	86					82H	(P) 81T	
	185/65R14	86	90			86H		86H	(P) 85T	
	185/65R15	88	92			88H				
	195/65R15	91	95			91H		91H	(P) 89T	
	205/65R15	94	99			94H		94H	(P) 92T	
	215/65R15	96	100			96H			(P) 95T	
	215/65R16	-	-		98T					
	225/65R17	-	-		102H					
	235/65R17	102	106		*104H	104H				
	245/65R17	-	-		*107T					
	265/65R17	-	-		*112T					
70	165/70R13	79	83						(P) 78T	
	175/70R13	82	86					82H	(P) 82T	
	185/70R13	86	-						(P) 85T	
	175/70R14	84	88					84H	(P) 84T	
	185/70R14	88	92					88H	(P) 87T	
	195/70R14	91	95					91H	(P) 90T	
	205/70R14	-	98					95H	(P) 93T	
	215/70R14	96	-						(P) 96T	
	205/70R15	96	100						(P) 95T	
	215/70R15	98	-						(P) 97T	
	225/70R15	100	104					(P) 100H		
	215/70R16	-	-		*100T					
	235/70R16	-	-		*106T					

[P] : P-metric sizes designed based on the TRA.

◆ SUMITOMO TIRES

PASSENGER CAR TYRES



Passenger
Car



4x4 (4WD) &
SUV



Light Truck



Truck



Bus



This is just a sample image.

HTR ZIII

FLAGSHIP STEEL BELTED RADIAL

Sumitomo's Flagship tyre which is finally completed its development process under state of the art technology of Sumitomo's global network.
This innovative HTR ZIII with asymmetric tread pattern is categorized as premium performance tyre for its premium performance.
Its special tread compound and tread design never sacrifice wet grip.

HTR ZIII



Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
295/25ZR22	97	Y	○	BLK	TL	○	○	707	301	10.50	10.00 - 11.00	7.9
285/30ZR18	97	Y	○	BLK	TL	○	○	629	290	10.00	9.50 - 10.50	7.9
295/30ZR18	94	Y		BLK	TL	○	○	635	301	10.50	10.00 - 11.00	7.9
265/30ZR19	93	W	○	BLK	TL	○		643	266	9.50	9.00 - 10.00	7.9
265/30ZR19	93	Y	○	BLK	TL	○		643	266	9.50	9.00 - 10.00	7.9
275/30ZR19	96	Y	○	BLK	TL	○	○	649	278	9.50	9.00 - 10.00	7.9
235/30ZR20	88	W	○	BLK	TL	○		650	239	8.50	8.50 - 8.50	7.9
235/30ZR20	88	Y	○	BLK	TL	○		651	239	8.50	8.50 - 8.50	7.9
245/30ZR20	90	W	○	BLK	TL	○		656	241	8.50	8.00 - 9.00	7.9
245/30ZR20	90	Y	○	BLK	TL	○		657	241	8.50	8.00 - 9.00	7.9
255/30ZR20	92	Y	○	BLK	TL	○		662	252	9.00	8.50 - 9.50	7.9
275/30ZR20	97	Y	○	BLK	TL	○	○	674	278	9.50	9.00 - 10.00	7.9
285/30ZR20	99	Y	○	BLK	TL	○	○	680	290	10.00	9.50 - 10.50	7.9
215/35ZR18	84	W	○	BLK	TL	○		607	218	7.50	7.00 - 8.50	8.1
215/35ZR18	84	Y	○	BLK	TL	○		609	213	7.50	7.00 - 8.50	8.1
255/35ZR18	94	W	○	BLK	TL	○		635	260	9.00	8.50 - 10.00	7.9
255/35ZR18	94	Y	○	BLK	TL	○	○	635	260	9.00	8.50 - 10.00	7.9
265/35ZR18	97	Y	○	BLK	TL	○	○	643	271	9.50	9.00 - 10.50	7.9
275/35ZR18	95	Y		BLK	TL	○	○	649	278	9.50	9.00 - 11.00	7.9
285/35ZR18	97	Y		BLK	TL	○	○	657	290	10.00	9.50 - 11.00	7.9
225/35ZR19	88	W	○	BLK	TL	○		641	230	8.00	7.50 - 9.00	8.2
225/35ZR19	88	Y	○	BLK	TL	○		642	229	8.00	7.50 - 9.00	8.2
235/35ZR19	91	Y	○	BLK	TL	○	○	647	241	8.50	8.00 - 9.50	8.1
245/35ZR19	93	Y	○	BLK	TL	○	○	655	248	8.50	8.00 - 9.50	8.1
255/35ZR19	96	Y	○	BLK	TL	○	○	661	260	9.00	8.50 - 10.00	7.9
275/35ZR19	96	Y		BLK	TL	○		675	278	9.50	9.00 - 11.00	7.9
285/35ZR19	99	Y		BLK	TL	○		684	284	10.00	9.50 - 11.00	7.9
225/35ZR20	90	Y	○	BLK	TL	○	○	666	230	8.00	7.50 - 9.00	8.2
245/35ZR20	95	Y	○	BLK	TL	○	○	680	248	8.50	8.00 - 9.50	8.1
255/35ZR20	97	Y	○	BLK	TL	○	○	686	260	9.00	8.50 - 10.00	8.1
275/35ZR20	102	Y	○	BLK	TL	○	○	700	278	9.50	9.00 - 11.00	7.9
* 205/40ZR17	80	W		BLK	TL	○	○	596	212	7.50	7.00 - 8.00	8.0
* 215/40ZR17	83	W		BLK	TL	○	○	604	218	7.50	7.00 - 8.50	8.2
245/40ZR17	95	W	○	BLK	TL	○		628	248	8.00	8.00 - 9.50	8.1
245/40ZR17	95	Y	○	BLK	TL	○	○	628	248	8.50	8.00 - 9.50	8.1
255/40ZR17	94	Y		BLK	TL	○	○	636	260	9.00	8.50 - 10.00	8.1
275/40ZR17	98	Y		BLK	TL	○	○	652	278	9.50	9.00 - 11.00	7.9
215/40ZR18	89	Y	○	BLK	TL	○	○	629	218	7.50	7.00 - 8.50	8.1
225/40ZR18	92	Y	○	BLK	TL	○	○	637	230	8.00	7.50 - 9.00	8.1
235/40ZR18	95	W	○	BLK	TL	○		645	241	8.50	8.00 - 9.50	8.1
235/40ZR18	95	Y	○	BLK	TL	○	○	645	241	8.50	8.00 - 9.50	8.1
245/40ZR18	97	Y	○	BLK	TL	○	○	653	248	8.50	8.00 - 9.50	8.1
255/40ZR18	99	Y	○	BLK	TL	○	○	661	260	9.00	8.50 - 10.00	8.1
265/40ZR18	101	Y	○	BLK	TL	○	○	669	271	9.50	9.00 - 10.50	8.1
275/40ZR18	99	W		BLK	TL	○		677	278	9.50	9.00 - 11.00	7.9
275/40ZR18	99	Y		BLK	TL	○	○	677	278	9.50	9.00 - 11.00	7.9
225/40ZR19	93	W	○	BLK	TL	○		663	230	8.00	7.50 - 9.00	8.1
225/40ZR19	93	Y	○	BLK	TL	○		665	229	8.00	7.50 - 9.00	8.1
245/40ZR19	98	Y	○	BLK	TL	○	○	679	248	8.50	8.00 - 9.50	8.1
255/40ZR19	100	W	○	BLK	TL	○		687	260	9.00	8.50 - 10.00	8.1
255/40ZR19	100	Y	○	BLK	TL	○	○	687	260	9.00	8.50 - 10.00	8.1
275/40ZR19	101	Y		BLK	TL	○	○	703	278	9.50	9.00 - 11.00	7.9

*=HTR ZII

HTR ZIII

FLAGSHIP

STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
245/40ZR20	99	Y	○	BLK	TL	○	○	704	248	8.50	8.00 - 9.50	8.1
* 205/45ZR16	83	W		BLK	TL	○	○	590	206	7.00	6.50 - 7.50	8.0
215/45ZR17	87	Y		BLK	TL	○	○	626	213	7.00	7.00 - 8.00	8.1
225/45ZR17	94	Y	○	BLK	TL	○	○	634	225	7.50	7.00 - 8.50	8.1
235/45ZR17	94	W		BLK	TL	○		644	236	8.00	7.50 - 9.00	8.1
235/45ZR17	94	Y		BLK	TL	○	○	644	236	8.00	7.50 - 9.00	8.1
245/45ZR17	95	Y		BLK	TL	○	○	652	243	8.00	7.50 - 9.00	8.1
225/45ZR18	95	Y	○	BLK	TL	○	○	659	225	7.50	7.00 - 8.50	8.1
245/45ZR18	100	Y	○	BLK	TL	○	○	677	243	8.00	7.50 - 9.00	8.1
255/45ZR18	103	Y	○	BLK	TL	○	○	687	255	8.50	8.00 - 9.50	8.1
245/45ZR19	98	Y		BLK	TL	○	○	703	243	8.00	7.50 - 9.00	8.1
* 205/50ZR16	87	W		BLK	TL	○	○	612	214	6.50	5.50 - 7.50	7.9
205/50ZR17	93	W	○	BLK	TL	○	○	638	214	6.50	5.50 - 7.50	8.1
205/50ZR17	93	Y	○	BLK	TL	○		638	214	6.50	5.50 - 7.50	8.1
215/50ZR17	95	Y	○	BLK	TL	○	○	648	226	7.00	6.00 - 7.50	8.0
225/50ZR17	94	W		BLK	TL	○		658	233	7.00	6.00 - 8.00	8.1
225/50ZR17	94	Y		BLK	TL	○	○	658	233	7.00	6.00 - 8.00	8.1
235/50ZR17	96	Y		BLK	TL	○	○	668	245	7.50	6.50 - 8.50	8.1
235/50ZR18	97	W		BLK	TL	○		693	245	7.50	6.50 - 8.50	8.1
235/50ZR18	97	Y		BLK	TL	○	○	693	245	7.50	6.50 - 8.50	8.1
235/55ZR17	99	W		BLK	TL	○		690	245	7.50	6.50 - 8.50	8.1
235/55ZR17	99	Y		BLK	TL	○	○	690	245	7.50	6.50 - 8.50	8.1
* 225/60ZR16	98	W		BLK	TL		○	676	228	6.50	6.00 - 8.00	8.0
* 235/60ZR16	100	W		BLK	TL		○	688	240	7.00	6.50 - 8.50	8.1

*=HTR ZII

HTR ENHANCE L/X

STEEL BELTED RADIAL

HTR ENHANCE is the next evolution of performance touring tyre. It offers an optimum blend of ride comfort and handling agility.



Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
215/55R17	94	V		BLK	TL	○		667	221	7.00	6.00 - 7.50	8.5
225/55R17	97	V		BLK	TL	○		678	230	7.00	6.00 - 8.00	8.6
235/55R18	100	V		BLK	TL	○		712	238	7.50	6.50 - 8.50	8.7
235/60R16	100	V		BLK	TL			686	241	7.00	6.50 - 8.50	8.7
225/60R17	99	T		BLK	TL	○		703	222	6.50	6.00 - 8.00	9.1
* 245/60R18	105	T		BLK	TL	○		751	245	7.00	7.00 - 8.50	9.1
215/65R16	98	T		BLK	TL			685	221	6.50	6.00 - 7.50	9.1
225/65R17	102	H		BLK	TL			726	229	6.50	6.00 - 8.00	8.7
* 235/65R17	104	H		BLK	TL			735	242	7.00	6.50 - 8.50	8.7
* 245/65R17	107	T		BLK	TL			748	247	7.00	7.00 - 8.50	9.2
* 265/65R17	112	T		BLK	TL			774	278	8.00	7.50 - 9.50	9.2
* 215/70R16	100	T		BLK	TL			707	226	6.50	5.50 - 7.00	9.1
* 235/70R16	106	T		BLK	TL			735	245	7.00	6.00 - 8.00	9.2

*=HTR ENHANCE C/X

HTR A/S P01

STEEL BELTED RADIAL

SUMITOMO's Ultra high performance all-season tyre which has superior level of grip on wet, dry and snow-covered road.

Wide tread 5rib pattern provides quick and direct steering response.

Efficient four wide grooves enhance wet performance.

HTR A/S P01



Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
205/40R17	84	W	○	BLK	TL	○	○	599	213	7.50	7.00 - 8.00	7.9
245/40R17	91	W		BLK	TL	○	○	631	248	8.50	8.00 - 9.50	8.1
255/40R17	94	W		BLK	TL	○		638	259	9.00	8.50 - 10.00	8.1
225/40R18	88	W		BLK	TL	○	○	640	230	8.00	7.50 - 9.00	8.1
245/40R18	93	W		BLK	TL	○	○	656	246	8.50	8.00 - 9.50	8.1
205/45R17	88	W	○	BLK	TL	○		619	203	7.00	6.50 - 7.50	7.9
215/45R17	87	W		BLK	TL	○	○	629	215	7.00	7.00 - 8.00	8.0
225/45R17	91	W		BLK	TL	○	○	636	227	7.50	7.00 - 8.50	8.1
235/45R17	94	W		BLK	TL	○	○	647	240	8.00	7.50 - 9.00	8.1
245/45R17	95	W		BLK	TL	○	○	656	245	8.00	7.50 - 9.00	8.1
215/45R18	89	W		BLK	TL	○		656	213	7.00	7.00 - 8.00	8.0
225/45R18	91	W		BLK	TL	○		662	225	7.50	7.00 - 8.50	8.1
245/45R18	100	W	○	BLK	TL	○		683	242	8.00	7.50 - 9.00	8.1
205/50R16	87	H		BLK	TL	○	○	611	212	6.50	5.50 - 7.50	7.9
205/50R16	87	V		BLK	TL	○		613	212	6.50	5.50 - 7.50	7.9
225/50R16	92	H		BLK	TL	○	○	631	231	7.00	6.00 - 8.00	8.1
225/50R16	92	V		BLK	TL	○		631	234	7.00	6.00 - 8.00	8.1
245/50R16	97	H		BLK	TL	○	○	650	252	7.50	7.00 - 8.50	8.1
245/50R16	97	W		BLK	TL	○		650	253	7.50	7.00 - 8.50	8.1
205/50R17	89	W		BLK	TL	○	○	643	209	6.50	5.50 - 7.50	7.9
215/50R17	91	W		BLK	TL	○	○	649	223	7.00	6.00 - 7.50	8.0
225/50R17	94	W		BLK	TL	○	○	663	229	7.00	6.00 - 8.00	8.1
235/50R18	101	W	○	BLK	TL	○		695	241	7.50	6.50 - 8.50	8.1
195/55R15	85	V		BLK	TL	○	○	594	200	6.00	5.50 - 7.00	7.8
205/55R16	91	H		BLK	TL	○	○	630	215	6.50	5.50 - 7.50	7.9
205/55R16	91	V		BLK	TL	○	○	630	215	6.50	5.50 - 7.50	7.9
215/55R16	93	H		BLK	TL	○	○	640	226	7.00	6.00 - 7.50	8.0
215/55R16	93	V		BLK	TL	○	○	640	226	7.00	6.00 - 7.50	8.0
225/55R16	95	H		BLK	TL	○	○	653	236	7.00	6.00 - 8.00	8.1
225/55R16	95	V		BLK	TL	○	○	653	236	7.00	6.00 - 8.00	8.1
215/55R17	94	V		BLK	TL	○	○	674	225	7.00	6.00 - 7.50	8.0
225/55R17	97	H		BLK	TL	○	○	683	234	7.00	6.00 - 8.00	8.1
225/55R17	97	V		BLK	TL	○	○	683	234	7.00	6.00 - 8.00	8.1
235/55R17	99	H		BLK	TL	○	○	692	243	7.50	6.50 - 8.50	8.1
235/55R17	99	W		BLK	TL	○	○	691	245	7.50	6.50 - 8.50	8.1
185/60R14	82	H		BLK	TL		○	576	187	5.50	5.00 - 6.50	7.9
195/60R14	86	H		BLK	TL		○	589	200	6.00	5.50 - 7.00	8.0
195/60R15	88	H		BLK	TL		○	613	201	6.00	5.50 - 7.00	8.0
205/60R15	91	H		BLK	TL		○	626	206	6.00	5.50 - 7.50	8.1
215/60R15	94	H		BLK	TL		○	637	221	6.50	6.00 - 7.50	8.1
205/60R16	92	H		BLK	TL		○	650	208	6.00	5.50 - 7.50	8.1
205/60R16	92	V		BLK	TL		○	650	208	6.00	5.50 - 7.50	8.1
215/60R16	99	H	○	BLK	TL		○	663	221	6.50	6.00 - 7.50	8.1
215/60R16	95	V		BLK	TL		○	662	221	6.50	6.00 - 7.50	8.1
225/60R16	98	H		BLK	TL		○	675	227	6.50	6.00 - 8.00	8.1
225/60R16	98	V		BLK	TL		○	675	227	6.50	6.00 - 8.00	8.1
235/60R16	100	H		BLK	TL		○	686	242	7.00	6.50 - 8.50	8.1
225/60R18	100	H		BLK	TL		○	727	225	6.50	6.00 - 8.00	8.1
185/65R14	86	H		BLK	TL		○	594	189	5.50	5.00 - 6.50	7.9
185/65R15	88	H		BLK	TL		○	620	191	5.50	5.00 - 6.50	7.9
195/65R15	91	H		BLK	TL		○	635	202	6.00	5.50 - 7.00	8.0
205/65R15	94	H		BLK	TL		○	646	212	6.00	5.50 - 7.50	8.1
215/65R15	96	H		BLK	TL		○	659	223	6.50	6.00 - 7.50	8.1
235/65R17	104	H		BLK	TL		○	738	239	7.00	6.50 - 8.50	8.1

HTR2000

STEEL BELTED RADIAL

The HTR2000 white letter is high performance tyre with asymmetric tread pattern. Three straight grooves and long lateral slots and special tread compound realizes both wet performance and long life.



Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
P245/50R14	93	S		WLT	TL	○		600	246	7.50	7.00 - 8.50	8.1
P265/50R15	99	S		WLT	TL	○		645	267	8.50	7.50 - 9.50	8.0
P295/50R15	105	S		WLT	TL	○		676	298	9.50	8.00 - 10.50	8.1
P235/60R14	96	S		WLT	TL			640	239	7.00	6.50 - 8.50	7.8
P245/60R14	98	S		WLT	TL			648	245	7.00	7.00 - 8.50	8.1
P255/60R15	102	S		WLT	TL			686	259	7.50	7.00 - 9.00	8.1
P275/60R15	107	S		WLT	TL			707	283	8.00	7.50 - 9.50	8.1

HTR200

STEEL BELTED RADIAL

A wide straight grooves and long lateral channels provide excellent wet performance while its tread compound and rigid tread blocks enhances resistance to tread wear.



Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
175/50R13	72	H		BLK	TL	○	○	509	176	5.50	5.00 - 6.00	7.6
195/50R15	82	H		BLK	TL	○	○	581	195	6.00	5.50 - 7.00	7.8
205/50R15	86	H		BLK	TL	○	○	590	210	6.50	5.50 - 7.50	7.9
225/50R15	91	H		BLK	TL	○	○	609	229	7.00	6.00 - 8.00	8.1
185/60R13	80	H		BLK	TL		○	552	186	5.50	5.00 - 6.50	7.7
195/60R13	84	H		BLK	TL		○	565	198	6.00	5.50 - 7.00	7.8
205/60R13	87	H		BLK	TL		○	574	205	6.00	5.50 - 7.50	7.9
185/60R14	82	H		BLK	TL		○	577	186	5.50	5.00 - 6.50	7.7
195/60R14	86	H		BLK	TL		○	590	198	6.00	5.50 - 7.00	7.8
205/60R14	89	H		BLK	TL		○	602	205	6.00	5.50 - 7.50	7.9
195/60R15	88	H		BLK	TL		○	619	197	6.00	5.50 - 7.00	7.8
205/60R15	91	H		BLK	TL		○	630	202	6.00	5.50 - 7.50	7.9
215/60R15	94	H		BLK	TL		○	639	218	6.50	6.00 - 7.50	8.0
175/65R14	82	H		BLK	TL		○	583	178	5.00	5.00 - 6.00	7.7
185/65R14	86	H		BLK	TL		○	591	188	5.50	5.00 - 6.50	7.8
195/65R15	91	H		BLK	TL		○	633	200	6.00	5.50 - 7.00	7.9
205/65R15	94	H		BLK	TL		○	641	208	6.00	5.50 - 7.50	8.0
175/70R13	82	H		BLK	TL		○	573	176	5.00	4.50 - 6.00	7.3
175/70R14	84	H		BLK	TL		○	601	176	5.00	4.50 - 6.00	7.3
185/70R14	88	H		BLK	TL		○	614	191	5.50	4.50 - 6.00	7.6
195/70R14	91	H		BLK	TL		○	627	200	6.00	5.00 - 6.50	7.8
205/70R14	95	H		BLK	TL		○	641	210	6.00	5.00 - 7.00	7.9
P225/70R15	100	H		SL	TL			695	225	6.50	6.00 - 7.50	7.8

HTR T4

STEEL BELTED RADIAL

The HTR T4 is designed for the high-performance sedans. Its five-rib pattern enhances wet grip performance and anti-hydroplaning capabilities. In addition, tread compound which enhances wear resistance provides longer life than its predecessor HTR TOUR.



Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
P205/55R16	89	T		BLK	TL	○	○	633	206	6.50	5.50 - 7.50	7.9
P185/60R14	82	T		BLK	TL		○	582	178	5.50	5.00 - 6.50	7.7
P195/60R14	85	T		BLK	TL		○	593	193	6.00	5.50 - 7.00	7.8
P195/60R15	87	T		BLK	TL		○	615	192	6.00	5.50 - 7.00	7.8
P205/60R15	90	T		BLK	TL		○	626	199	6.00	5.50 - 7.50	8.0
P215/60R15	93	T		BLK	TL		○	645	212	6.50	6.00 - 7.50	8.0
P215/60R16	94	T		BLK	TL		○	664	216	6.50	6.00 - 7.50	8.1
P225/60R16	97	T		BLK	TL		○	677	222	6.50	6.00 - 8.00	8.0
P175/65R14	81	T		BLK	TL		○	586	167	5.00	5.00 - 6.00	7.7
P185/65R14	85	T		BLK	TL		○	600	188	5.50	5.00 - 6.50	7.8
P195/65R15	89	T		BLK	TL		○	636	198	6.00	5.50 - 7.00	7.9
P205/65R15	92	T		BLK	TL		○	649	208	6.00	5.50 - 7.50	8.0
P215/65R15	95	T		BLK	TL		○	662	221	6.50	6.00 - 7.50	8.0
P165/70R13	78	T		BLK	TL		○	564	171	5.00	4.00 - 5.50	7.2
P175/70R13	82	T		BLK	TL		○	577	178	5.00	4.50 - 6.00	7.3
P185/70R13	85	T		BLK	TL		○	592	189	5.50	4.50 - 6.00	7.6
P175/70R14	84	T		BLK	TL		○	603	176	5.00	4.50 - 6.00	7.5
P185/70R14	87	T		BLK	TL		○	618	191	5.50	4.50 - 6.00	7.6
P195/70R14	90	T		BLK	TL		○	633	200	6.00	5.00 - 6.50	7.8
P205/70R14	93	T		BLK	TL		○	645	209	6.00	5.00 - 7.00	7.9
P215/70R14	96	T		BLK	TL		○	660	223	6.50	5.50 - 7.00	8.1
P205/70R15	95	T		BLK	TL		○	671	209	6.00	5.00 - 7.00	7.9
P215/70R15	97	T		BLK	TL		○	682	226	6.50	5.50 - 7.00	8.1

HTR4

STEEL BELTED RADIAL

The HTR4 is a P-metric all season high performance tyre with its performance balances on dry, wet and snowy conditions. Its triangular blocks give high traction in snow, four wide straight grooves channel water away. The tyre also achieves high grip on dry road by optimizing the void ratio of the tread.



Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
P225/60R15	95	H		BLK	TL		○	652	229	6.50	6.00 - 8.00	8.1

SC890

STEEL BELTED RADIAL

The SC890 is a P-metric, premium all season tyre with its advanced tread compound providing mileage and traction in all season conditions. Its four wide grooves and curved lateral grooves channel water away, projecting edges of twin triangular center blocks bite into snowy road and optimize void ratio to provide dry traction.



Tyre Size	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
										Measuring (inch)	Approved (inch)	
P205/70R14	93	S		SL	TL		○	647	211	6.00	5.00 - 7.00	8.7
P215/70R15	97	S		SL	TL		○	686	223	6.50	5.50 - 7.00	8.8
P185/75R14	89	S		SL	TL		○	633	180	5.00	4.50 - 6.00	8.4
P195/75R14	92	S		SL	TL		○	650	199	5.50	5.00 - 6.50	8.4
P205/75R14	95	S		SL	TL		○	663	197	5.50	5.00 - 7.00	8.5
P205/75R15	97	S		SL	TL		○	689	197	5.50	5.00 - 7.00	8.5
P215/75R15	100	S		SL	TL		○	702	214	6.00	5.50 - 7.00	8.6
P225/75R15	102	S		SL	TL		○	721	230	6.00	6.00 - 7.50	8.7
P235/75R15	105	S		SL	TL		○	736	237	6.50	6.00 - 8.00	8.8
P165/80R13	83	S		SL	TL		○	600	171	4.50	4.00 - 5.50	8.2
P185/80R13	90	S		SL	TL			626	184	5.00	4.50 - 6.00	8.4

◆ SUMITOMO TIRES

4x4(4WD)& SUV TYRES



Passenger
Car



4x4 (4WD) &
SUV



Light Truck



Truck



Bus



This is just a sample image.

4x4 (4WD) & SUV TYRES

LINE-UP AND APPLICATION

SERIES	TYRE SIZE	4x4 (RV/SUV)		
		HTR SPORT HP	SERENGETI A/T SL850	
35	265/35R22	102 H		
	285/35R22	106H		
	305/35R24	112H		
40	265/40R22	106H		
	305/40R22	114H		
45	275/45R20	110H		
	295/45R20	(P) 114H		
	285/45R22	114H		
	305/45R22	(P) 118H		
50	285/50R20	116H		
	305/50R20	120H		
55	255/55R18	109H		
	275/55R20	117H		
60	285/60R18	116H		
	275/60R20	(P) 114H		
65	275/65R15			
	275/65R17			
70	205/70R15		(P) 95S	
	215/70R16		(P) 99S	
	265/70R16		(P) 111S	
	275/70R16		(P) 114S	
75	215/75R15			
	235/75R15			
	265/75R16		(LT) 112/109Q	
80	275/80R15			
85	215/85R16		(LT) 110/107M	
	235/85R16		(LT) 120/116M	
	245/85R16			
95	235/95R15C			
-	10R15LT			
	30X9.50R15LT		(6PR) 105N	
	31X10.50R15LT		(6PR) 109Q	
	33X12.50R15LT		(6PR)	

SUMITOMO TYRE POSITIONING MAP

HTR SPORT HP



SERENGETI A/T SL850



SL830



SERENGETI SL840



ON ROAD

OFF ROAD

		SAND TYRES	
SL830	SERENGETI SL840	SHAHEEN μ 01	SHAHEEN μ 02
		109S	115T
		114H	
(LT) 100/97N (LT) 104/101N	(LT) 104/101N		
			116S
			114S
			116/114N
	(6PR) 105N (6PR) 109N (6PR)		



REMARKS

WLT : Raised White Letter

OWL : Outlined White Letter

BLT : Raised Black Letter

MFS : Maximum Flange Shield

RF : Reinforced

XL : Extra Load

TT : Tubed Type

TL : Tubeless

SL830

STEEL BELTED RADIAL

SL830 is designed for 4×4 vehicles for an application of an on/off ratio of 60/40. The bulky tread provides high traction and flotation under adverse conditions.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
LT215/75R15		100/97	N		OWL	TL			707	222	6.00	5.50 - 7.00	12.1
LT235/75R15		104/101	N		OWL	TL		○	735	246	6.50	6.00 - 7.00	12.6

SERENGETI SL840

STEEL BELTED RADIAL

SERENGETI SL840 is designed for 4×4, LT vehicles for an application of an on/off ratio of 40/60. The aggressive tread pattern provides powerful traction and superb self-cleaning capability on rough terrain, while it offers a smooth, stable ride on the road.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
LT235/75R15		104/101	N		OWL	TL		○	734	229	6.50	6.00 - 7.00	14.6
30X9.50R15LT	6	105	N		OWL	TL		○	755	253	7.50	6.50 - 8.50	14.6
31X10.50R15LT	6	109	N		OWL	TL		○	781	274	8.50	7.00 - 9.00	14.6
33X12.50R15LT	6				OWL	TL			827	324	10.00	8.50 - 11.00	15.0

SERENGETI A/T SL850

STEEL BELTED RADIAL

The SERENGETI A/T is all terrain tyre providing an excellent blend of on-highway comfort and off-road traction.

The tread design and construction features ensure low noise, long mileage, ride comfort and even wear.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
P205/70R15		95	S		BLT	TL		○	675	202	6.00	5.00 - 7.00	9.7
P215/70R16		99	S		BLT	TL		○	709	212	6.50	5.50 - 7.00	9.7
P265/70R16		111	S		OWL	TL		○	776	280	8.00	7.00 - 9.00	10.2
P275/70R16		114	S		OWL	TL		○	792	282	8.00	7.00 - 9.00	10.2
LT265/75R16		112/109	Q		OWL	TL		○	796	266	7.50	7.00 - 8.00	12.3
LT215/85R16		110/107	M		BLK	TL		○	772	215	6.00	5.50 - 7.00	12.3
LT235/85R16		120/116	M		BLK	TL		○	806	234	6.50	6.00 - 7.50	12.3
30X9.50R15LT	6	105	N		OWL	TL		○	744	254	7.50	6.50 - 8.50	12.3
31X10.50R15LT	6	109	Q		OWL	TL		○	769	282	8.50	7.00 - 9.00	12.3
33X12.50R15LT	6				OWL	TL			822	324	10.00	8.50 - 11.00	13.1

HTR SPORT HP

STEEL BELTED RADIAL

HTR SPORT HP is all season tyre for highway and paved road use, which is especially suitable for SUVs inch-up applications.

Straight grooves and long lateral grooves are made for outstanding water drainage and rigid blocks for solid steering response.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
265/35R22		102	H		BLK	TL	○		744	269	9.50	9.00 - 10.50	11.0
285/35R22		106	H	○	BLK	TL	○		759	286	10.00	9.50 - 11.00	11.0
305/35R24		112	H	○	BLK	TL	○		824	310	11.00	10.00 - 12.00	11.0
265/40R22		106	H	○	BLK	TL	○		770	268	9.50	9.00 - 10.50	11.0
305/40R22		114	H	○	BLK	TL	○		802	310	11.00	10.00 - 12.00	11.0
275/45R20		110	H	○	BLK	TL	○		756	269	9.00	8.50 - 10.50	11.0
P295/45R20		114	H		BLK	TL	○		772	295	10.00	9.50 - 11.00	11.0
285/45R22		114	H	○	BLK	TL	○		813	283	9.50	9.00 - 10.50	11.0
P305/45R22		118	H	○	BLK	TL	○		832	306	10.00	9.50 - 11.00	11.0
285/50R20		116	H	○	BLK	TL	○		797	284	9.00	8.00 - 10.00	11.0
305/50R20		120	H	○	BLK	TL	○		814	305	9.50	8.50 - 11.00	11.0
255/55R18		109	H	○	BLK	TL	○		733	262	8.00	7.00 - 9.00	10.9
275/55R20		117	H	○	BLK	TL	○		815	279	8.50	7.50 - 9.50	11.0
285/60R18		116	H		BLK	TL	○		800	291	8.50	8.00 - 10.00	11.3
P275/60R20		114	H		BLK	TL	○		839	277	8.00	7.50 - 9.50	10.4

SHAHEEN µ01

STEEL BELTED RADIAL

SHAHEEN µ01 is a high performance tyre in the aspect ratio of 65% & 70% provides excellent high speed stability, durability and maneuverability on highway without sacrifice of traction on sand. Straight rib pattern and radial construction provide very quiet and comfortable driving.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
275/65R15		109	S		WLT	TL			745	288	8.00	7.50 - 9.50	8.3
275/70R16		114	H		WLT	TL			786	272	8.00	7.00 - 9.00	8.4

SHAHEEN µ02

STEEL BELTED RADIAL

SHAHEEN µ02 in the aspect ratio of 95% designed for optimum performance on soft sand offering a higher on-road capability than ordinary bias tyres. SHAHEEN µ02 in the aspect ratio of 65%, 80%, 85% & 95% is suited for a very wide range of application from highways to soft sand. The same technologies as µ01 are applied to this µ02 to ensure an ideal balance of performance both on-road and on-sand.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
275/65R17		115	T		BLT	TL			787	286	8.00	7.50 - 9.50	8.7
275/80R15		116	S		WLT	TL			819	281	8.00	7.00 - 9.00	8.6
245/85R16		114	S		BLT	TT			820	245	7.00	6.50 - 8.00	8.7
235/95R15C		116/114	N		BLT	TT			823	238	6.50	6.00 - 7.50	7.8

◆ SUMITOMO TIRES

LIGHT TRUCK TYRES



Passenger
Car



4x4 (4WD) &
SUV



Light Truck



Truck



Bus



This is just a sample image.

SL717

STEEL BELTED RADIAL

SL717 is a commercial light truck tyre designed for highway service. The flat tread with siped shoulders gives excellent mileage and road holding performance.




Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
7.00R15LT	8				BLK	TL			751	200	5.50	5.00 - 6.50	10.8
6.50R16LT		109/107	M		BLK	TT		○	751	181	4.50	4.50 - 6.00	10.2
7.00R16LT		116/114	M		BLK	TT		○	777	190	6.00	5.50 - 7.00	10.7
* 7.50R16LT	14	122/120	L		BLK	TL		○	805	212	6.00	6.00 - 6.00	12.2
7.50R16LT	12				BLK	TT			809	214	6.00	5.50 - 7.00	10.8
7.50R16LT		121/120	M		BLK	TT			812	213	6.00	5.50 - 7.00	10.8
* 8.5R17.5LT	12				BLK	TL		○	804	212	6.00	5.25 - 6.75	11.6

*=ALL STEEL RADIAL

SL725

STEEL BELTED RADIAL

SL725 is designed for pickups and delivery vans. The shoulder ribs suppress eccentric abrasion and provide excellent traction.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
155R12C	8	88/86	N		BLK	TL		○	555	158	4.50	4.00 - 5.00	8.0
165R13C	8	94/92	N		BLK	TL			603	165	4.50	4.00 - 5.00	8.2
175R14C	8				BLK	TL		○	638	175	5.00	4.50 - 5.50	8.5

SL726

STEEL BELTED RADIAL

SL726 is designed for pickups and delivery vans. The tyre features outstanding wear resistance and high speed stability as well as excellent braking.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
185R14C		102/100	P		BLK	TL		○	651	190	5.50	5.00 - 6.00	9.3
195R14C		106/104	P		BLK	TL		○	669	195	5.50	5.00 - 6.00	9.7
195R15C		106/104	P		BLK	TL		○	690	194	5.50	5.00 - 6.00	9.7

SL828

STEEL BELTED RADIAL

SL828 is an all season tyre. Unique blocks provide excellent traction and braking power on various kinds of roads.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
											Measuring (inch)	Approved (inch)	
205R16C		110/108	N		BLK	TL		○	739	213	6.00	5.25 - 6.75	10.2

SAFETY INFORMATION

for PCR / 4x4 / LTR TYRES

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation, overloading, excessive wear or other use conditions.

A tyre is wear-sensitive and all tyres eventually wear out. A worn or damaged tyre can present a safety hazard, and a tyre failure can lead to an accident that may result in property damage, injuries or death.

To reduce the risk of tyre failure we instruct you as follows:

- 1 CHECK** the air pressure in all your tyres, including the spare, frequently when tyres are cool.
(when your vehicle has been driven less than a few kilo-meters or after being stopped for three or more hours)
Don't reduce air pressure when tyres are hot from driving; use a tyre gauge to check the pressure and maintain it at the level recommended by vehicle manufacturer.
- 2 NEVER** overload your tyres. The maximum load carrying capability of your tyre is molded on the sidewall of each tyre.
- 3 CHECK** your tyres regularly for scraps, bulges, separations, cuts, snags or embedded foreign objects.
Show the tyres your store or dealer immediately if any such condition is discovered.
- 4 NEVER** operate your vehicle in excess of lawful speeds, beyond maximum speeds determined by driving conditions or at speeds greater than recommended for the tyre you are using.
- 5 MAKE** every effort to avoid driving over objects that may damage the tyres through impact or cutting such as potholes, glass, metal, etc.
- 6 NEVER** drive on bald tyres. Always remove tyres from service and replace them when they reach the remaining 1.6mm of the tyre depth.
Tread wear indicators are built into the tyres to indicate when they are worn to 1.6mm.
It is illegal to drive the tyres with less than 1.6mm remaining tread depth.
- 7 DON'T** spin tyres excessively on mud, snow, ice, etc. as this can cause tyre explosion or disintegration, as well as axle failure.

IMPORTANT INFORMATION is molded on the sidewall.

Among other information, the sidewall information contains the tyre size, load range, maximum load and maximum pressure for that particular tyre.

Always follow the instructions and recommendations of the vehicle manufacturer, as contained in the vehicle Owner's Manual.

WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TYRE/RIM ASSEMBLY, IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- ONLY** specially trained persons should mount tyres.
- ALWAYS** match rim diameter with tyre diameter.
- NEVER** mount a tyre on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- NEVER** put a flammable substance into a tyre.
- ALWAYS** clean and lubricate the rim and tyre beads.
- ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- ALWAYS** stand clear, and **NEVER** lean or reach over the tyre/rim assembly when inflating.
- NEVER** inflate over 40 psi (275 kPa) to seat bead.
- ALWAYS** adjust tyre pressure to the vehicle manufacturer's recommendations after beads are fully seated.

◆ SUMITOMO TIRES

TRUCK & BUS TYRES



Passenger
Car



4x4 (4WD) &
SUV



Light Truck



Truck



Bus



This is just a sample image.

TRUCK & BUS TYRES

AVAILABLE SIZES & PATTERN AND APPLICATION

This chart indicates the most suitable SUMITOMO truck radial tyres for each application.

PATTERN		RIB			TRACTION	RIBLUG		LUG
Size	Application	Long Haul	Regional			Regional	On/Off	
CONVENTIONAL SIZES	10.00R15		ST727					
	7.50R15		ST727					
	8.25R15		ST727					
	10.00R20	ST738	ST727		ST908		ST518	ST900
	11.00R20	ST738	ST727		ST908	ST506	ST518	
	12.00R20		ST727			ST506	ST508	
	8.25R20		ST727					
	9.00R20		ST727					
	11.00R22	ST738					ST508	
	11.00R24						ST508	
	12.00R24		ST768	ST709		ST506		ST636A
	325/95R24		ST768					
	10R17.5		ST727					
	8R19.5		ST718					
	9R22.5		ST727					
	10R22.5		ST727					
	11R22.5	ST738	ST727	ST791	ST908		ST518	ST900
	12R22.5	ST738	ST727		ST908		ST518	ST900
	11R24.5	ST738	ST727		ST908		ST518	ST900
LP SIZES	275/80R22.5	ST718						
	295/80R22.5	ST718			ST908			
	315/80R22.5	ST718	ST768		ST908		ST518	
	225/70R19.5	ST718						
	245/70R19.5	ST718						
	265/70R19.5							
	255/70R22.5		ST727		ST908			
	275/70R22.5		ST727	ST791	ST908			
	215/75R17.5		ST727					
	235/75R17.5		ST727					
	245/75R22.5	ST718						
	295/75R22.5	ST738			ST908			
285/75R24.5	ST738			ST908				
W/S	385/65R22.5			ST770		ST720		
	425/65R22.5					ST720		
	445/65R22.5					ST720		

Long Haul



Steer Axle

ST718
ST738


Drive Axle

ST908

Trailer Axle

ST718 ST727
ST720 ST738

Regional Haul



Steer Axle

ST718 ST768
ST727 ST791
ST738 ST709

Drive Axle

ST738 ST791
ST768 ST908
ST709

Trailer Axle

ST718 ST738
ST720 ST768
ST727 ST709

Urban, Pick-up & Delivery



Steer Axle

ST718 ST768
ST727

Drive Axle

ST718 ST768
ST727 ST908

On and Off



Steer Axle

ST506 ST518
ST508 ST720

Drive Axle

ST636A
ST900

Trailer Axle

ST506 ST720
ST508 ST770

ST738

ALL STEEL RADIAL

ST738 is premium truck radial tyre optimized for a steering axle. In addition, it has an all position capability. The wide and deep tread delivers long mileage. The combination of advanced 5-rib tread pattern and a developed casing profile ensure even wear, low rolling resistance and excellent retreading ability.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
10.00R20	16	146/143L	TT	○	1056	280	7.50	7.00 - 8.00	15.1
11.00R20	16		TT		1081	294	8.00	7.50 - 8.50	14.6
11.00R22	16	150/146K	TT	○	1133	294	8.00	7.50 - 8.50	14.6
11R22.5		148/144M	TL	○	1058	285	8.25	7.50 - 8.25	15.1
12R22.5	16	152/147M	TL	○	1081	298	9.00	8.25 - 9.00	14.6
11R24.5	16	149/146L	TL	○	1108	286	8.25	7.50 - 8.25	14.2
295/75R22.5	14		TL		1018	287	9.00	8.25 - 9.00	14.2
285/75R24.5	16	147/145M	TL	○	1052	270	8.25	7.50 - 9.00	14.2

ST718

ALL STEEL RADIAL

A premium truck radial tyre optimized for a steering axle. 5-rib tread design is engineered to distribute the load more evenly and provides improved footprint to reduce irregular wear. Its wide and deep tread is designed to deliver long mileage, as well as low rolling resistances to save fuel consumption. Tough premium carcass ensured excellent retreading ability.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
8R19.5	12		TL		856	203	6.00	5.25 - 6.75	13.0
225/70R19.5	12		TL		810	225	6.75	6.00 - 6.75	12.5
245/70R19.5		129/127M	TL	○	845	241	7.50	6.75 - 7.50	12.5
245/70R19.5	14	133/131M	TL		845	243	7.50	6.75 - 7.50	12.5
245/75R22.5	14		TL		947	240	7.50	6.75 - 7.50	14.4
275/80R22.5		148/145M	TL	○	1022	281	8.25	7.50 - 8.25	14.9
295/80R22.5	16	152/147M	TL	○	1049	306	9.00	8.25 - 9.00	13.9
315/80R22.5	18	154/151M	TL	○	1077	315	9.00	9.00 - 9.75	14.4

ST768

ALL STEEL RADIAL

The ST768 is an all position tyre designed for paved and limited off road use of middle east countries. Unique 4 rib pattern with wider and flatter tread radius provides better handling stability and reduces uneven tread wear. In addition, special tread compound ensure longer tread life as well as low heat generation.



ST768 GOLDMAX

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
* 12.00R24	18	156/153K	TT	○	1214	317	8.50	8.00 - 9.00	12.9
12.00R24	20	160/156K	TT	○	1213	312	8.50	8.00 - 9.00	14.8
*** 12.00R24	20	160/156K	TT	○	1212	315	8.50	8.00 - 9.00	14.8
*** 315/80R22.5		154/150M	TL	○	1078	312	9.00	9.00 - 9.75	16.6
** 325/95R24		162/160K	TT	○	1214	317	9.00	8.50 - 10.00	12.9

*=ST768PLUS **=ST768GOLD MAX ***=ST768GOLD PLUS

ST727

ALL STEEL RADIAL

An all position tyre for highway use. The unique 5-rib tread wears evenly, and the grooves are designed to reduce stone retention problems.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
7.50R15	16	135/133F	TT	○	767	214	6.00	5.00 - 6.50	11.5
8.25R15		142/141F	TT	○	841	238	6.50	5.50 - 7.00	11.3
8.25R15		142/141K	TT	○	842	238	6.50	5.50 - 7.00	11.3
8.25R15		130/128K	TT		841	238	6.50	5.50 - 7.00	11.3
10.00R15		148/145F	TT	○	921	276	7.50	7.00 - 8.00	12.5
10.00R15	14		TT		920	276	7.50	7.00 - 8.00	12.5
10.00R15		148/145K	TT	○	921	276	7.50	7.00 - 8.00	12.5
10R17.5	16	134/132L	TL		861	248	7.50	6.75 - 7.50	12.9
8.25R20	14	136/134K	TT		968	231	6.50	5.50 - 7.00	12.5
9.00R20		141/139K	TT	○	1020	254	7.00	6.50 - 7.50	13.2
9.00R20		138/136K	TT		1020	252	7.00	6.50 - 7.50	13.2
10.00R20		146/143L	TT	○	1050	282	7.50	7.00 - 8.00	13.4
11.00R20		150/147L	TT	○	1086	292	8.00	7.50 - 8.50	13.9
12.00R20	18	154/151K	TT	○	1119	305	8.50	8.00 - 9.00	14.9
9R22.5	14	136/134L	TL		970	224	6.75	6.00 - 6.75	12.5
10R22.5	14	141/139L	TL	○	1022	254	7.50	6.75 - 7.50	13.2
11R22.5		148/144L	TL	○	1050	278	8.25	7.50 - 8.25	13.4
11R22.5		144/142L	TL		1049	278	8.25	7.50 - 8.25	13.4
12R22.5	16	152/148M	TL	○	1083	299	9.00	8.25 - 9.00	13.9
11R24.5		149/146L	TL		1100	279	8.25	7.50 - 8.25	13.4
11R24.5		146/143L	TL		1100	278	8.25	7.50 - 8.25	13.4
255/70R22.5	16	140/137M	TL	○	927	252	7.50	6.75 - 8.25	12.5
275/70R22.5	16	148/145M	TL	○	961	277	8.25	7.50 - 8.25	13.3
215/75R17.5	14	126/124M	TL		777	214	6.00	6.00 - 6.75	12.5
215/75R17.5	16	135/133J	TL		779	214	6.00	6.00 - 6.75	12.5
235/75R17.5	18	143/141J	TL	○	801	237	6.75	6.75 - 7.50	13.0

ST791

ALL STEEL RADIAL

ST791 is designed for city bus use. Unique zigzag groove designed with deep sipes provides strong traction on both wet & dry condition. Special tread compound ensures long life and low heat generation. In addition, this tyre has sidewall protector to help resist curb scuffing.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
275/70R22.5	16	148/145J	TL	○	968	276	8.25	7.50 - 8.25	18.0
11R22.5	16	148/145G	TL		1064	286	8.25	7.50 - 8.25	19.0
11R22.5	16	148/145J	TL		1064	287	8.25	7.50 - 8.25	19.0

ST908

ALL STEEL RADIAL

An extra deep traction tyre for long tread life without sacrificing retreading ability. This tyre is especially designed for the long haul and suits applications that require extra mileage.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
10.00R20	16	146/143K	TT	○	1066	280	7.50	7.00 - 8.00	21.0
11.00R20	16	150/147L	TT	○	1096	297	8.00	7.50 - 8.50	21.1
11R22.5	16	146/144L	TL	○	1065	278	8.25	7.50 - 8.25	21.0
11R22.5	14	144/142L	TL		1064	278	8.25	7.50 - 8.25	21.0
12R22.5	16	152/147L	TL	○	1098	305	9.00	8.25 - 9.00	21.1
11R24.5	16	149/144L	TL	○	1116	279	8.25	7.50 - 8.25	21.0
11R24.5	14		TL		1116	279	8.25	7.50 - 8.25	21.0
255/70R22.5	16		TL		937	253	7.50	6.75 - 8.25	19.8
275/70R22.5	16	148/145L	TL		969	275	8.25	7.50 - 8.25	18.3
295/75R22.5	14		TL		1034	287	9.00	8.25 - 9.00	21.0
285/75R24.5	16	147/145M	TL	○	1067	270	8.25	7.50 - 9.00	21.0
295/80R22.5	16	152/147L	TL	○	1060	306	9.00	8.25 - 9.00	20.2
315/80R22.5	18	154/150M	TL	○	1086	313	9.00	9.00 - 9.75	20.2

ST770

ALL STEEL RADIAL

An all position wide base tyre for highway use. This unique tread pattern with 5-straight-rib and special tread compound provide smooth running and high fuel efficiency.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
385/65R22.5	18	160K(158L)	TL	○	1072	376	11.75	11.75 - 12.25	13.9

ST720

ALL STEEL RADIAL

An all position wide base tyre for ON AND limited OFF road service. It works well where more traction performance is required.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
385/65R22.5	18	160K(158L)	TL	○	1072	377	11.75	11.75 - 12.25	14.3
425/65R22.5	20	165K	TL	○	1122	418	13.00	13.00 - 14.00	14.9
445/65R22.5	20	168K	TL	○	1151	441	13.00	13.00 - 14.00	15.8

ST518

ALL STEEL RADIAL

A premium all position tyre designed for ON-AND-OFF road use.
This tyre provides excellent tread life, cut resistance and low stone retention under adverse road condition.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
10.00R20	16	146/143K	TT	○	1057	283	7.50	7.00 - 8.00	15.6
11.00R20	16	150/146K	TT	○	1088	292	8.00	7.50 - 8.50	16.4
11R22.5	16	148/144K	TL	○	1054	285	8.25	7.50 - 8.25	15.6
12R22.5	16	152/147K	TL	○	1089	304	9.00	8.25 - 9.00	16.4
11R24.5	16		TL		1105	284	8.25	7.50 - 8.25	15.6
315/80R22.5		154/150K	TL	○	1078	312	9.00	9.00 - 9.75	16.3

ST508

ALL STEEL RADIAL

An all position tyre designed for ON AND limited OFF road use.
This tyre is applicable for logging and mining services.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
12.00R20	18	154/151K	TT	○	1125	307	8.50	8.00 - 9.00	16.3
11.00R22	16	150/146K	TT	○	1138	294	8.00	7.50 - 8.50	15.8
11.00R24	16		TT		1190	293	8.00	7.50 - 8.50	15.8

ST506

ALL STEEL RADIAL

An all position tyre designed especially for Middle Eastern countries;
durable construction with a heat-resistant compound.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
11.00R20		150/146K	TT	○	1085	292	8.00	7.50 - 8.50	15.8
12.00R20	18	154/151K	TT	○	1123	307	8.50	8.00 - 9.00	15.8
* 12.00R24		156/153K	TT	○	1214	317	8.50	7.50 - 9.00	15.8

* =ST506PLUS

ST900

ALL STEEL RADIAL

ST900 is designed to deliver extra long tread life and enhance traction under tough conditions, such as mud and various rough terrain. Having 24.8mm original groove depth, this tyre features wide steel belts and cut resistance tread compound which ensure outstanding durability suitable for garbage trucks, logging trucks and other vehicles that require ON AND limited OFF roads performance.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
10.00R20	16	146/143G	TT		1078	280	7.50	7.00 - 8.00	24.8
11R22.5	16	146/143G	TL		1077	285	8.25	7.50 - 8.25	24.8
12R22.5	16	150/147G	TL		1104	305	9.00	8.25 - 9.00	24.8
11R24.5	16	149/146G	TL		1128	285	8.25	7.50 - 8.25	24.8

ST636A

ALL STEEL RADIAL

An ON-AND-OFF road service drive axle tyre with cut resistant compound on a deep-lug tread to provide excellent traction.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
12.00R24	18	156/153K	TT	○	1213	304	8.50	8.00 - 9.00	18.2

ST709

ALL STEEL RADIAL

ST709 is an all position tyre for highway use. Unique 5-rib tread pattern and wide and flat tread radius reduce uneven tread wear.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
12.00R24		156/153K	TT	○	1214	317	8.50	7.50 - 9.00	13.6

SAFETY INFORMATION

for TRUCK and BUS TYRES

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation, overloading, excessive wear or other use conditions.

A tyre is wear-sensitive and all tyres eventually wear out. A worn or damaged tyre can present a safety hazard, and a tyre failure can lead to an accident that may result in property damage, injuries or death.

To reduce the risk of tyre failure we instruct you as follows:

- 1 **CHECK** the air pressure in all your tyres, including the spare, frequently when tyres are cool.
(when your vehicle has been driven less than a few kilo-meters or after being stopped for three or more hours)
Don't reduce air pressure when tyres are hot from driving; use a tyre gauge to check the pressure and maintain it at the level recommended by vehicle manufacturer.
- 2 **NEVER** overload your tyres. The maximum load carrying capability of your tyre is molded on the sidewall of each tyre.
- 3 **CHECK** your tyres regularly for scraps, bulges, separations, cuts, snags or embedded foreign objects.
Show the tyres your store or dealer immediately if any such condition is discovered.
- 4 **NEVER** operate your vehicle in excess of lawful speeds, beyond maximum speeds determined by driving conditions or at speeds greater than recommended for the tyre you are using.
- 5 **MAKE** every effort to avoid driving over objects that may damage the tyres through impact or cutting such as potholes, glass, metal, etc.
- 6 **NEVER** drive on bald tyres. Always remove tyres from service and replace them when they reach the remaining 1.6m/m of the tyre depth.
Tread wear indicators are built into the tyres to indicate when they are worn to 1.6m/m.
It is illegal to drive the tyres with less than 1.6m/m remaining tread depth.
- 7 **DON'T** spin tyres excessively on mud, snow, ice, etc. as this can cause tyre explosion or disintegration, as well as axle failure.

IMPORTANT INFORMATION is molded on the sidewall.

Among other information, the sidewall information contains the tyre size, load range, maximum load and maximum pressure for that particular tyre.

Always follow the instructions and recommendations of the vehicle manufacturer, as contained in the vehicle Owner's Manual.

WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TYRE/RIM ASSEMBLY, IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- **ONLY** specially trained persons should mount tyres.
- **ALWAYS** match rim diameter with tyre diameter.
- **NEVER** mount a tyre on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- **ALWAYS** make sure inside of tyre is dry before mounting. Moisture in tyre can damage casing.
- **NEVER** put a flammable substance into a tyre.
- **ALWAYS** clean and lubricate the rim and tyre beads.
- **ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- **ALWAYS** inflate with dry air from compressor having properly-working moisture filter.
- **ALWAYS** lock the wheel on the tyre mounting machine, or place it in a safety cage when inflating.
- **ALWAYS** stand clear, and **NEVER** lean or reach over the tyre/rim assembly when inflating.
- **NEVER** inflate over 40 psi (275 kPa) to seat bead.
- **ALWAYS** adjust tyre pressure to the vehicle manufacturer's recommendations after beads are fully seated.

CORPORATE DATA

GUIDE TO PROVING GROUNDS

Sumitomo Rubber's tyre proving grounds in Okayama, Nayoro, and Asahikawa support evolution of tyre through severe tests conducted on many kinds of roads of the world and on various driving conditions.

OKAYAMA

This Lane merges with the Roads of the World.

Sumitomo Rubber's Okayama Proving Ground reproduces the world's roads and a wide variety of driving conditions. The expansive site, with a total area of 1,000,000 square meters, is fully equipped with a 3,200-meter main circuit, a handling stability test track, wet roads, a noise and vibration test track, and tyre noise evaluation devices, among many others. To provide drivers around the world with greater safety and comfort, the site plays an invaluable role in the research and development of high-performance tyres that boast superior handling and refined comfort, and next generation tyres including run-flat tyres, electric car tyres and ultra-lightweight tyres.



ASAHIKAWA High Quality winter tyres are born here - Sumitomo Rubber Asahikawa Proving Ground

Asahikawa Proving Ground, specially designed for winter testing, is located in the city of Asahikawa in Hokkaido and boasts a total area of 210,000 square meters. The facility includes a 1,400-meter main circuit and a variety of ice and packed snow surfaces, making it an important base of research and development for winter tyres.




NAYORO Winter Tyre Special Evaluation Center - Sumitomo Rubber Nayoro Proving Ground

Nayoro Proving Ground, specially designed for winter testing, is located in the city of Nayoro in Hokkaido, and boasts a total area of 870,000 square meters. The facility includes a 2,200-meter main circuit, and variety of ice and packed snow surfaces, making this an important base of research and development for winter tyres.



OVERSEAS OFFICES

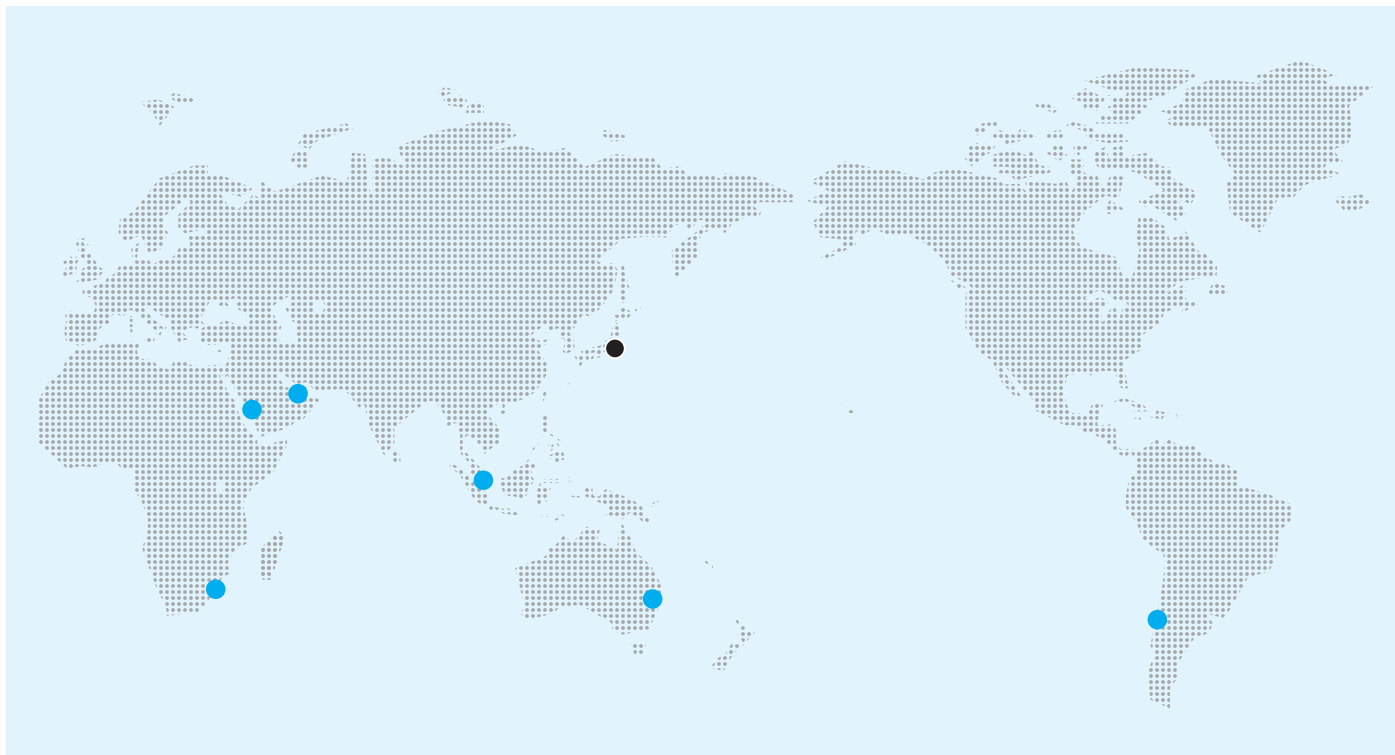

Sumitomo Rubber Middle East Jeddah branch c/o BINZAGR COMPANY

P. O. Box 54, Jeddah 21411 Saudi Arabia
TEL: +966-2-663-7327 FAX: +966-2-663-5522

Sumitomo Rubber Asia Tyre PTE. LTD.

1 Maritime Square #09-58 Harborfront Centre Singapore
099253, Singapore
TEL: +65-6278-6975 FAX: +65-6278-4049

Sumitomo Rubber Middle East FZE.

P. O. Box 54901, Dubai, UAE
TEL: 04-2146959 FAX: 04-2146960

Sumitomo Rubber Latin America Limitada

Av. El Bosque Norte N° 0123, Of. 902,
Las Condes, Santiago, Chile
TEL: +56-2-244-5190 FAX: 56-2-244-1815

Sumitomo Rubber South Africa (Pty) Ltd.

The Old Factory Building, Lion Match Office Park
892 Umgeni Road, Durban, 4001, Kwazulu-Natal, South Africa
PO Box 925, Durban, Kwazulu-Natal, 4000
TEL: +27 31 242 1111 FAX: + 27 31 242 1605

Sumitomo Rubber Australia Pty. Ltd.

32 Riverside Road Chipping Norton NSW
2170 Australia
TEL: +61(0)2-8774-2900 FAX: +61(0)2-9755-4599



 SUMITOMO RUBBER SOUTH AFRICA (PTY) LTD.

The Old Factory Building, Lion Match Office Park, 892 Umgeni Road, Durban, 4001, Kwazulu-Natal, South Africa TEL: +27 31 242 1111 FAX: + 27 31 242 1605
PO Box 925, Durban, Kwazulu-Natal, 4000

 SUMITOMO RUBBER INDUSTRIES, LTD.

Toyosu Center Building, 3-3, 3-chome, Toyosu, Koto-ku, Tokyo 135-6005, Japan TEL: +81-3-5546-0126 FAX: +81-3-5546-0146

5.3A 15.12 (OS-297) ㊞4㊞㊞